


Saddle Connection Specification

Saddle Connection

Product Code SEE TABLE

The saddle connection has been developed to provide a secure rigid connection point for a drainage pipe. The saddle connection fits to the outside face of a HPSC plastic modular soakaway conduit or modular bulk soakaway tank. The connection saddle is physically attached using a securing pin (see product 1700103) which is inserted through holes in the top and bottom of the saddle into the soakaway structure.

The connection saddle can be supplied to suit any pipe diameter and most soakaway conduit / tank depths as per the table below.

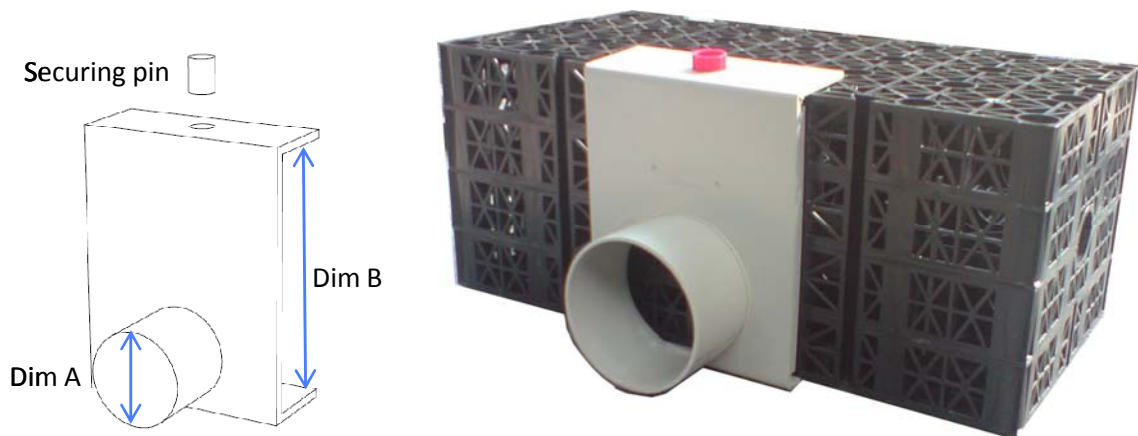

Product Code	Description	Connection Diameter (mm) A	Height (mm) B
1701201	Saddle pin fixed	110	150
1701202	Saddle pin fixed	110	300
1701203	Saddle pin fixed	160	150
1701204	Saddle pin fixed	160	300
1701205	Saddle pin fixed	315	300
1701206	Saddle pin fixed	225	300
1701207	Saddle pin fixed	160	450
1701208	Saddle pin fixed	110	450
1701209	Saddle pin fixed	315	450
1701210	Saddle pin fixed	225	450
1701211	Saddle pin fixed	400	450
1701212	Saddle pin fixed	160	400
1701213	Saddle pin fixed	225	400
1701214	Saddle pin fixed	315	400
1701215	Saddle pin fixed	400	400
1701216	Saddle pin fixed	160	354
1701217	Saddle pin fixed	160	708
1701218	Saddle slot fixed	110	354
1701219	Saddle slot fixed	160	354
1701220	Saddle slot fixed	225	354
1701221	Saddle slot fixed	315	354



Saddle Connection Specification

Saddle Connection

Product Code SEE TABLE

Product Code	Description	Connection Diameter (mm) A	Height (mm) B
1701222	Saddle pin fixed	110	800
1701223	Saddle pin fixed	160	800
1701224	Saddle pin fixed	225	800
1701225	Saddle pin fixed	315	800
1701226	Saddle pin fixed	400	800
1701227	Saddle pin fixed	160	600
1701228	Saddle pin fixed	225	600
1701229	Saddle pin fixed	315	600
1701230	Saddle pin fixed	400	600
1701231	Saddle pin fixed	110	170

Disclaimer

This product specification is neither giving nor implying warranty for the use of this information for design and installation, as these are beyond our control. The data provided is typical and based upon the mean values obtained from the samples taken for any one test. If not otherwise indicated the test procedures reflect usually the mean of five samples. Skeletank Limited reserve the right to change the specifications without prior notice. Skeletank® is a trade mark registered by Skeletank Limited.

**Skeletank Limited,
Stormer Hill Works, Tottington,
Bury, Lancashire
BL8 4AT**

**Telephone: 0845 177 1535
Fax: 01204 885533
E-Mail: sales@skeletank.co.uk
Web: www.skeletank.co.uk**